

rayMAX 25 IP

INFRA-RED PRODUCT RANGE

The RAYMAX series of High Performance Infra-Red LED illuminators provide class leading performance, long life and ultra low maintenance. They incorporate the very latest surface mount LED's to deliver excellent night-time pictures with improved optical output and outstanding reliability.

The RAYMAX 25 IP Infra-Red illuminator is designed to provide dedicated lighting for network cameras via a PoE (Power over Ethernet) enabled infrastructure. Installation is as simple as plugging in the PoE enabled network cable. With an in-built photocell plus internal 'command and control' electronics the RAYMAX 25 IP is truly 'plug and play'.

Each unit is fitted with a Cool Running™ thermal management system to carefully control LED output and delivers a projected working life of 10 years.

RAYMAX 25 IP is suitable for all internal low light installations up to 30 metres (98ft).



POWERFUL

- Distances up to 30m (98ft)
- **PLATINUM** LED technology
- Integrated PSU with Command and Control electronics

FLEXIBLE


- PoE input (or 12-24V)
- Various angles (10°, 30°, 50° or 120°)
- One click easy installation

RELIABLE

- 10 year life
- Active LED Life Control
- Vandal resistant

CONTROLLED

- Automatic operation via photocell
- Even Output Illumination
- Semi-Covert (850nm) or Covert (950nm) Options

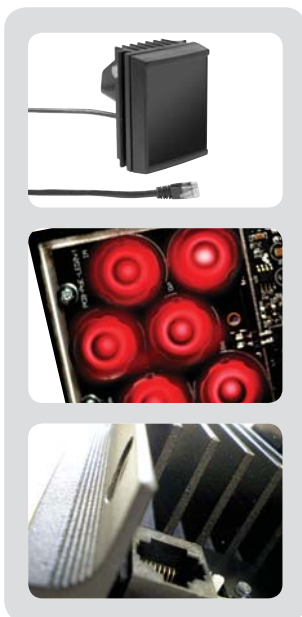

INFRA-RED IN USE:





Infra-Red off



Infra-Red on

APPLICATIONS





PoE ENABLED

The RAYMAX IP and RAYLUX IP series is designed to provide dedicated lighting for IP cameras via a PoE - (Power over Ethernet) enabled network infrastructure. Installation is as simple as plugging in the Ethernet cable. With an in-built photocell plus internal command and control electronics the light is truly plug and play.



ACTIVE LED LIFE CONTROL

All Rayled illuminators employ cutting edge materials science techniques to improve thermal efficiency throughout the unit and ensure continuity of LED power. The New Advanced Cool Running™ system draws heat away from the LEDs, shielding the LED from abnormal stress, and allows Rayled LED products to deliver outstanding performance and consistency of illumination throughout the operational life of the illuminator.



PLATINUM ADVANCED SMT LED TECHNOLOGY

PLATINUM illuminators integrate cutting-edge SMT LED technology, light intensification miniature optics and an enhanced Cool Running™ thermal management system into a single high performance LED. The result is World leading power, reliability and flexibility.



COMMAND AND CONTROL TECHNOLOGY

Integrated into all Fusion Illuminators, Command and Control technology provides photocell, photocell level adjustment and power adjustment functionality on the actual illuminator. This eliminates the need for a specialist external power supply.



VANDAL RESISTANT

The polycarbonate lens design protects against severe blows from crowbars, baseball bats and can even withstand successive shots from air pistols and rifles (range dependant).



ENERGY SAVING


All Rayled illuminators use high efficiency LED's and advanced control methods to deliver extremely low electrical consumption. Rayled illuminators are energy saving and deliver huge savings in running costs compared to traditional bulb illuminators.

3 YEAR WARRANTY

All CCTV / IP illuminators are provided with a 3 year warranty, unmatched anywhere in the CCTV lighting industry.



TECHNICAL SPECIFICATIONS

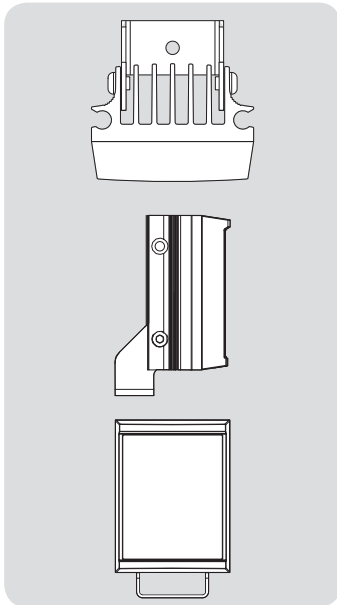

ILLUMINATOR & INTEGRATED PSU

Max Distance: up to 30m (98ft)
Angle: 10, 30, 50 or 120 degrees
Optics: PLATINUM SMT LED's
Consumption: 12W max
Weight: 1.0kg (2.2lbs)
Environmental: Indoor Applications Only
Temp Range: -30 to +50°C (-58 to 122°F)
Colour: Black
Wavelength: 850 or 950nm
Dimensions: 75 x 100 x 54mm
 3" x 4" x 2" approx

BRACKETRY
 U Bracket included

INTEGRATED POWER SUPPLY

Input: PoE
 24V ac/dc
 12V dc
Power over Ethernet (PoE): IEEE802.3af
 Compliant Interface
 Power classification (class 0)
Output: 12W max (adjustable)
Photocell: Integrated
 (adjustable sensitivity)
Power Control: Full 10-100% adjustment

PART CODES & DISTANCES

RM25-10-IP	RAYMAX 25, 10°	850nm & integrated PSU	30m (98ft)
RM25-30-IP	RAYMAX 25, 30°	850nm & integrated PSU	20m (66ft)
RM25-50-IP	RAYMAX 25, 50°	850nm & integrated PSU	14m (46ft)
RM25-120-IP	RAYMAX 25, 120°	850nm & integrated PSU	8m (26ft)

DISTANCES